




軸用C型扣環

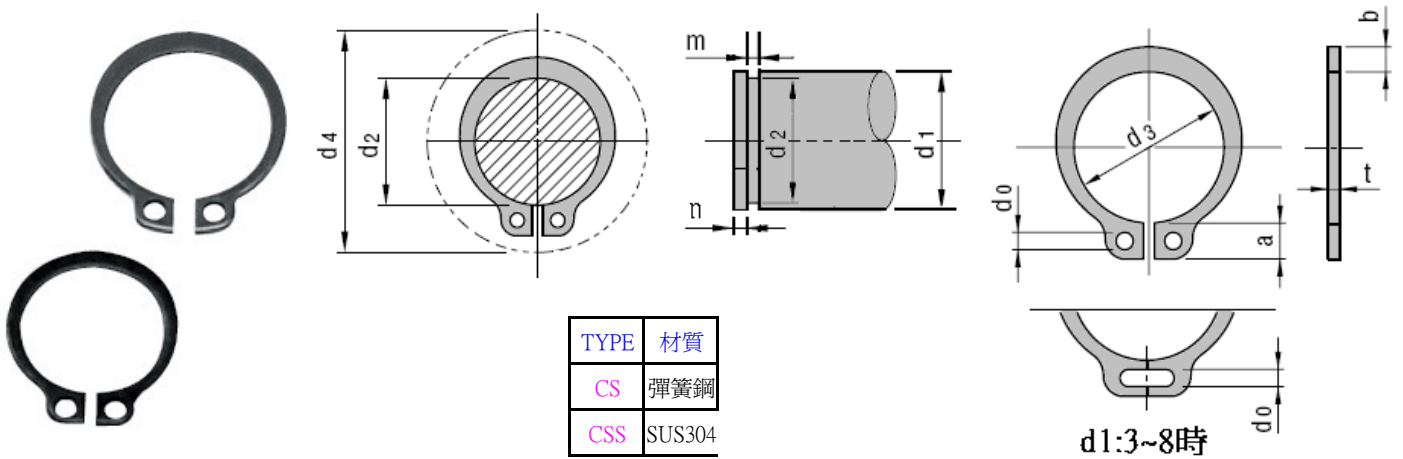

TYPE	材質
CS	彈簧鋼
CSS	SUS304

d1:3~8吋

Type	No.	扣環						d4參考	適用軸							
		d3	容許公差	t	容許公差	概估			do (最小)	d1	d2	容許公差	m	容許公差	n (最小)	
						b	a									
CS	3	2.7	+0.04	0.25	±0.025	0.5	1.7	0.7	7	3	2.85	0	0.35	+0.10 0	0.3	
	4	3.7		0.4	±0.03	0.9	2.2	0.8	9	4	3.8					0.5
	5	4.7	+0.06	0.6	±0.04	1.1	2.4	1	10.5	5	4.8	0	0.7			0.5
	6	5.6		0.7		1.3	2.8		12	6	5.7		0.8			
	7	6.5	0.8	1.4		3	14	7	6.7	0	0.9	0.6				
8	7.4	-0.2	1.6	3		15	8	7.6	-0.06	0.9						
CSS	4	3.6	±0.1	0.25		±0.03	0.7	1.4	0.7	9	4	3.7	±0.06	0.3	+0.10 0	1.5
	5	4.5		0.4	±0.04	0.7	1.4	10.5		5	4.7	0.45				
	6	5.5		0.8	2.0	1	12	6	5.7	0.7						
	7	6.3		0.9	2.0		14	7	6.5							
8	7.1	1.0	2.2	15	8	7.4										
CS CSS	10	9.3	±0.15	1	±0.05	1.8	3	1.2	17	10	9.6	-8.09	1.15	+0.14 0	1.5	
	11	10.2				2	3.1		18	11	10.5					
	12	11.1	±0.18			2.1	3.2	1.5	19	12	11.5					0
	13	12							2.1	3.3	20					
	14	12.9	±0.18			2.2	3.4	1.7	22	14	13.4					-0.11
	15	13.8							2.2	3.5	23					
	16	14.7	±0.18			2.2	3.6	1.7	24	16	15.2					0
	17	15.7							2.2	3.7	25					
	18	16.5	±0.18			2.6	3.8	2	26	18	17					-0.21
	19	17.5							2.6	3.8	27					
	20	18.5	±0.2	2.7	3.9	2	28	20	19	0						
	21	19.5					2.7	4	30		21	20				
	22	20.5	±0.2	2.9	4.1	2	31	22	21	-0.21						
	23	21.4					2.9	4.5	32.5		23	22				
	24	22.2	±0.2	3.1	4.2	2	33	24	22.9	0						
	25	23.2					3.1	4.3	34		25	23.9				
	26	24.2	±0.2	3.1	4.4	2	35	26	24.9	-0.21						
	28	25.9					3.1	4.6	38		28	26.6				
	29	26.9	±0.2	3.5	4.7	2	39	29	27.6	0						
	30	27.9					3.5	4.8	40		30	28.6				
32	29.6	±0.25	4	5	2.5	43	32	30.3	-0.25							
35	32.2					4	5.4	46		35	33					
40	37	±0.4	1.75	4.5	±0.07	53	40	38	0							
45	41.5					4.5	5.8	58		45	42.5					
50	45.8	±0.4	2	4.8	±0.07	5	6.7	2.2								
52	47.8					5	6.8		64	50	47					
60	55.8	±0.45	2	5.5	±0.07	75	60	57	0							
80	74.5					5.5	7.2	75		60	57					
				7.4	8.2	97	80	76.5	-0.3	2.7		2.5				

Order TYPE — No.

訂貨代號 CS — 10