




時規皮帶惰輪
TIMING IDLERS PULLEYS < S2M >



Pulley Shapes :

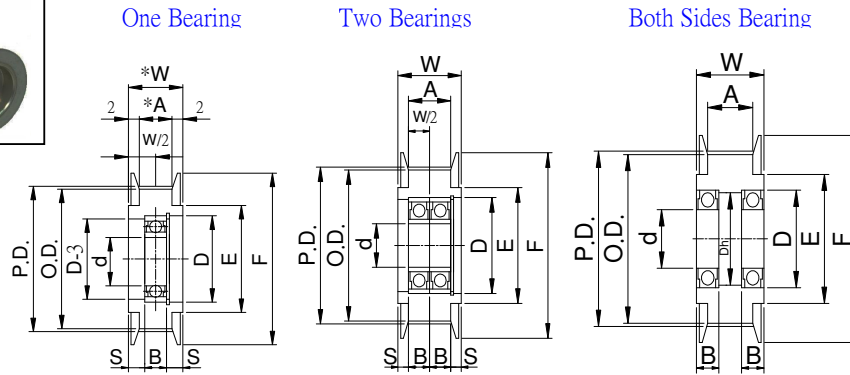

Type	Material	Treatment	Flange	Flange Treatment
IDAAA	A7075	Anodize	A6061	Anodize
IDAEA		Electroless nickel		Electroless nickel
IDS	1045	—	1045	—
IDSS	SUS308	—	A6061	Anodize

▲S2M (Central Bearing)

Type	Catalog No.		P.D	O.D	F	E	A	W	S	Bearing Size			Retaining Ring			
	No.of Teeth	Teeth Width Code								No.	d	D	B	IDSS	IDSD	
IDAAA IDAEA IDS IDSS	40	S2M005	25.46	24.96	30	20	5	9	2.5	695ZZx1	5	13	4	RTWS13	RTWN13	
		S2M007					7	11	3		696ZZx1	6	15	5	RTWS15	RTWN15
		S2M011					11	15	5							
	48	S2M005	30.56	30.05	35	25	5	9	2	696ZZx2	6	15	5	RTWS15	RTWN15	
		S2M007					7	11	3							
	50	S2M005	31.83	31.32	35	25	5	9	2	696ZZx1	6	15	5	RTWS15	RTWN15	
		S2M007					7	11	2.5							8
	60	S2M005	38.20	37.69	44	32	5	9	1.5	698ZZx2	10	22	6	RTWS22	RTWN22	
		S2M007					7	11	2.5	6900ZZx1						

▲S2M (Both Sides Bearing)

Type	Catalog No.		Bore d	P.D	O.D	F	E	A	W	Dh	Bearing Size						
	No.of Teeth	Teeth Width Code									No.	D	B				
IDAAA IDAEA IDS IDSS	32	S2M005	3	20.37	19.86	25	16	5	9	5	673ZZx2	6	2.5				
		S2M007						7	11								
		S2M011						11	15					9.5	694ZZx2	11	4
	36	S2M005	4	22.92	22.41	28	18	5	9	6	674ZZx2	7	2.5				
		S2M007						7	11								
		S2M011						11	15					11	695ZZx2	13	4
	40	S2M005	4	25.46	24.96	30	20	5	9	6	674ZZx2	7	2.5				
		S2M007						7	11					11	695ZZx2	13	4
		S2M011						11	15					13	696ZZx2	15	5
	48	S2M011	8	30.56	30.05	35	25	11	15	16.5	698ZZx2	19	6				
	50	S2M011	8	31.83	31.32	35	25	11	15	16.5	698ZZx2	19	6				
	60	S2M011	8	38.20	37.69	44	32	11	15	16.5	698ZZx2	19	6				

*Ex : IDAA (Central Bearing) IDWAA (Both Sides B)

Order	TYPE	—	Catalog No.	—	Bore
訂貨代號	IDWAA	—	40S2M007	—	5

PS1 : if you need another exceptional to process the specifications form, please contact us.