





時規皮帶輪 L型 TIMING PULLEYS < L PULLEYS >

	Tooth Shape : 	Type	Material	Treatment	Flange	Flange Treatment
		PLAAA	A7075	Anodize Electroless nickel	A6061	Anodize Electroless nickel
		PLAEA				
		PLS	1045	—	1045	—
PLSS	SUS303	—	A6061	Anodize		

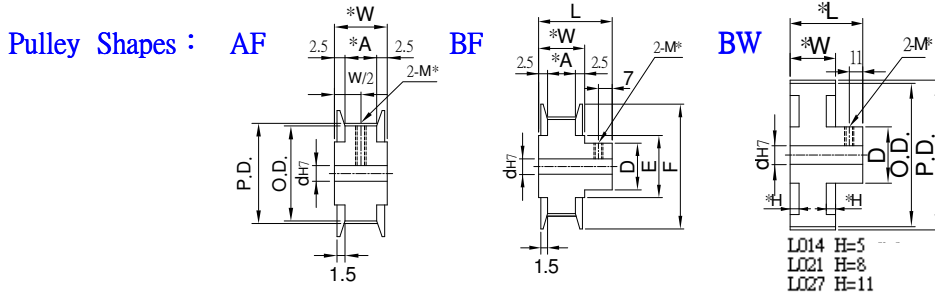

Type	Catalog No.			Bore configuration	Bore dh7				Bore W only (1mm Increment)		P.D.	O.D.	D	F	E	G				
	No. of teeth	Teeth Width Code	Pulley Shapes		U.T.TG Hole		W Hole		Z								J			
					AF	BF	AF	BF	AF	BF										
PLAAA PLAEA PLS PLSS	10	L014	AF	U	6~14	6~14	6~10	6~9	9~13	9~12	(AF) 3 ≤ J ≤ W-3	30.32	29.56	22	36	24				
	12	L014-L021			8~18	8~18	8~15	8~13	11~19	11~16		36.38	35.62	27	45	30				
	14				8~21	8~20	8~19	8~13	11~24	11~17		42.45	41.68	30	48	35				
	15				8~23	8~20	8~19	8~13	11~24	11~17		45.48	44.72							
	16	L014			BF	TG	10~23	10~22	10~24	10~17		13~28	13~21	48.51	47.75	32	55	40		
	17	A:14					10~26	10~23	10~24	10~18		13~28	13~22	51.54	50.78				34	
	18	W:19					10~29	10~23	10~28	10~20		13~32	13~25	54.57	53.81	36	61	45		
	19	L:31					12~30	12~25	12~30	12~22		15~35	15~26	57.61	56.84	38	67	50		
	20	(60 • 72=L:39)					12~30	12~26	12~30	12~25		15~35	15~30	60.64	59.88	40	70	56		
	21						12~38	12~26	12~30	12~25		15~42	15~30	63.67	62.91	42	80	60		
	22	L021					W	TG	12~38	12~30		12~30	12~28	15~46	15~33	66.7	65.94	45	87	67
	24	A:21							12~47	12~30		12~30	12~30	15~50	15~38	72.77	72.00	50	95	75
	25	W:26							12~50	12~30		12~30	12~30	15~50	15~38	75.8	75.04			
	26	L:38							12~50	12~30		12~30	12~30	15~50	15~38	78.83	78.07	56	104	84
	28	(60 • 72=L:46)			12~55	12~30			12~30	12~30		15~55	15~38	84.49	84.13	95	75			
	30				12~55	12~30			12~30	12~30		15~55	15~42	90.96	90.2	99	80			
	32	L027			W	W			14~55	14~30		14~30	14~30	18~55	18~42	97.02	96.26	63	111	90
	34	A:27							14~55	14~30		14~30	14~30	18~55	18~46	103.08	102.32			
	36	W:32							14~55	14~30		14~30	14~30	18~55	18~46	109.15	108.39	127	105	
	38	L:44							16~55	16~30		16~30	16~30	20~55	20~46	115.21	114.45	131	110	
	40	(60 • 72=L:53)					16~55	16~30	16~30	16~30		20~55	20~46	121.28	120.51	135	115			
	42						16~55	16~30	16~30	16~30		20~55	20~55	127.34	126.58	140	120			
	44	L040					W	W	16~55	16~30		16~30	16~30	20~55	20~55	133.4	132.64	71	144	125
	46	A:40							16~55	16~30		16~30	16~30	20~55	20~55	139.47	138.71			
	48	W:45							16~55	16~30		16~30	16~30	20~55	20~55	145.53	144.77	160	140	
	50	L:57							16~55	16~30		16~30	16~30	20~55	20~55	151.60	150.83	—	—	160
	60				16~30	16~30			16~30	16~30		20~55	20~55	181.91	181.15	197				
	72				16~30	16~30			16~30	16~30		20~55	20~55	218.3	217.53	—	—	—		

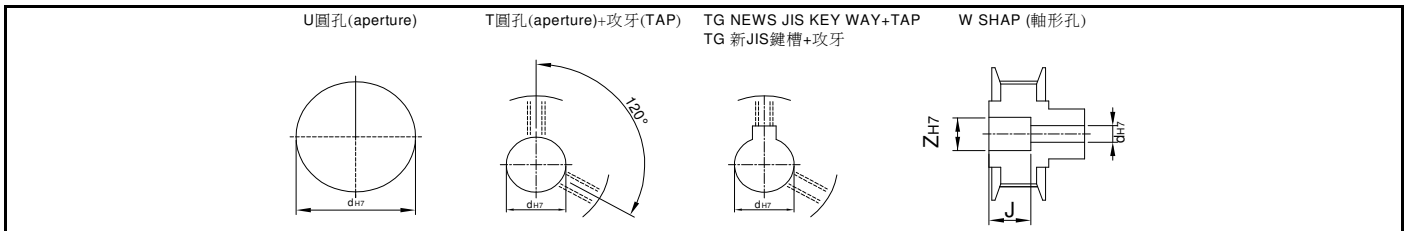

Order TYPE — Catalog No. — Bore configuration

訂貨代號 PLAA — 20L014BF — T10

PS1 : if you need another exceptional to process the specifications form, please contact us.


PS2 : Bore, Key Groove & Set Screw match, Please refer to **【Core & Key Groove & Set Screw Design Form】**.



Core & Key Groove & Set Screw Design Form

Core&Key Groove Dimension Form

dH7	Key Groove Width bjs9		Depth	tolerance
8	3	±0.0125	1.4	+ 0.1 0
9				
10				
11	4	±0.015	1.8	
12				
13				
14	5	±0.015	2.3	
15				
16				
17				
18	6	±0.015	2.8	
19				
20				
21				
22	8	±0.018	3.3	+ 0.2 0
23				
24				
25				
26				
28				
29				
30				
31				
32				
33	10	±0.0215	3.8	
34				
35				
38				
40	12	±0.0215	3.8	
42				
43				
44				
45	14	±0.0215	3.8	
46				
47				
48				
50				
50				

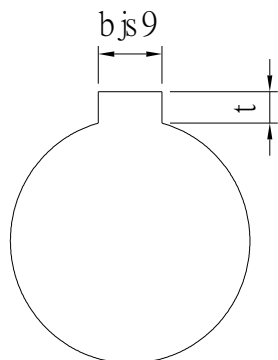

Core&Set Screw Form

dH7	M
4	M3
5	
6	
6.35	
7	
8	M4
9	
10	
11	
12	M5
13	
14	
15	
16	
17	M6
18	
19	
20	
21	
22	
23	
24	
25	
26	
28	M8
29	
30	
31	
32	
33	
34	
35	
37	M10
38	
40	
42	
43	
44	
45	
46	
47	
48	
50	
52	
55	
57	
60	