



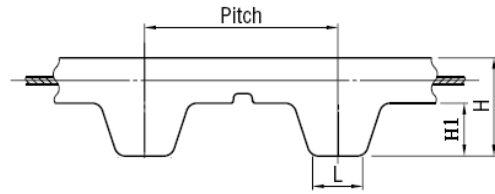

OPEN TIMING BELTS

XL-L-H T5-T10




Operating Temperature

- 20°C~80°C

TYPE	Main Body	Core Wire
BTOPPU	polyurethane (white)	Steel Cord

S3M-S5M-S8M 3M-5M-8M 3GT-5GT-8YU

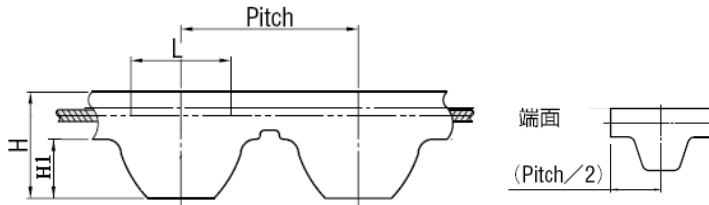

Type	Catalog No.		Number of teeth Size Range	Belt Width (mm)	Maximum Length(m)	Pitch	H	H1	L
	Type of Teeth	Belt width(mm)							
BTOP BTOPPU	XL	025	30~5905	6.4	30	5.08	2.25	1.25	1.35
		037		9.5					
		050		12.7					
	L	050	30~3149	12.7					
		075		19.1					
		100		25.4					
	H	075	45~2362	19.1					
		100		25.4					
		150		38.1					
		200		50.8					
	S3M/3M/3GT	006	40~10000	6		3	2	1.14	1.95
	S5M/5M/5GT	010	50~6000	10		5	3.81	1.81	3.25
		015		15					
		025		25					
	S8M/8M/8YU	015	60~33750	15		8	5	2.85	5.2
		025		25					
		030		30					
		040		40					
	T5	010	40~6000	10		5	2.2	1.2	1.8
		015		15					
020		20							
025		25							
T10	015	40~3000	15	10	4.5	2.5	3.5		
	020		20						
	025		25						
	030		30						

Order TYPE — Catalog NO. — Number of teeth

訂貨代號 BTOPPU — L100 — 2000