




## METAL FITTINGS FOR TIMING BELT 時規皮帶用齒排

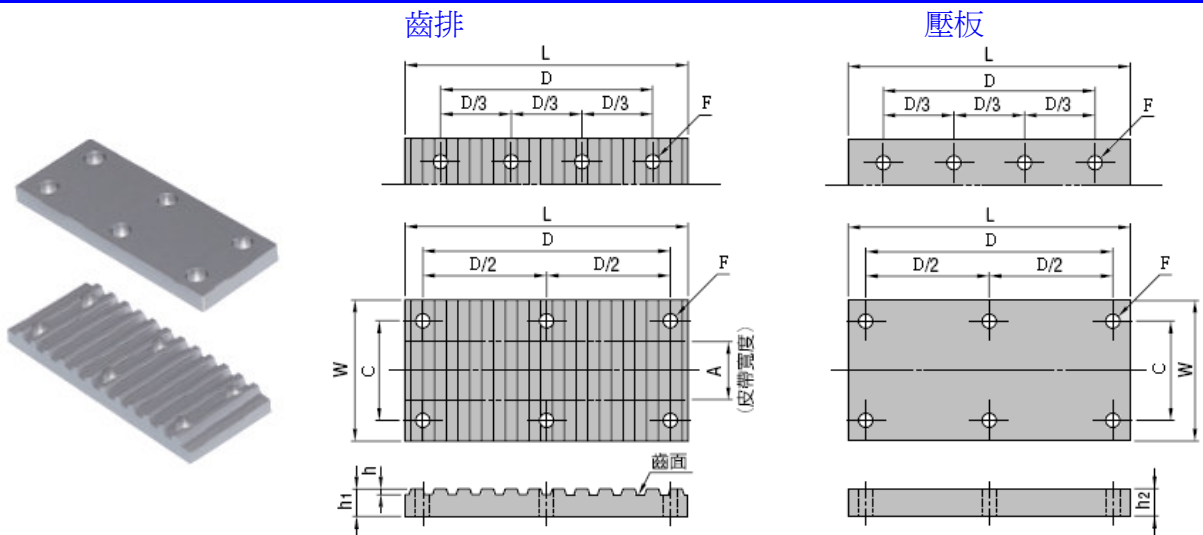

需配合開放式時規皮帶使用

TYPE	齒排、壓板材質	處理
PTAA	A6061	陽極
PTSC	S45C	鍍鉻
PTSH	S45C	無電解鍍

齒排+壓板為一組

Type	Catalog No.		A	L	W	h1	h2	h	D	C	F	安裝孔數
	皮帶種類	皮帶寬度 No.										
PTAA	XL	025	6.4	66	24	6	5	1.25	56	12	4.5	6
		031	7.9		25					14		
		037	9.5		26					16		
		050	12.7		30					20		
	L	050	12.7	124	32	8		1.90	111	20	5.5	8
		075	19.1		38					26		
		100	25.4		46					33		
		150	38.1		58					46		
	H	075	19.1	165	38	10		2.30	147	26	5.5	8
		100	25.4		46					33		
		150	38.1		58					45		
		200	50.8		70					58		
PTSC	3GT	S3M 006	6	39	18	4	4	1.14	31	10	3.4	6
		010	10		22					14		
		015	15		28					20		
PTSH	5M	S5M 010	10	65	26	6	5	1.81	51	16	4.5	6
		015	15		32					21		
		025	25		42					31		
	8GT	S8M 015	15	104	34	8	5	2.85	84	22	5.5	8
		025	25		44					32		
		030	30		50					37		
		040	40		60					47		
T5	T5	010	10	65	26	6	5	1.2	51	16	4.5	6
		015	15		32					21		
		020	20		38					26		
		025	25		43					31		
T10	T10	015	15	130	34	8	5	2.5	111	22	5.5	8
		020	20		40					27		
		025	25		44					32		
		030	30		50					37		

Order TYPE — Catalog No.  
 訂貨代號 PTAA — XL050

註1：如需規格表以外特殊加工，請來電告知。